


SVEZA HCV

SVEZA HCV – ready-to-install the plywood flooring set performed in accordance with trailer manufacturers' unique requirements including passing forklift wheel load, rolling and wear resistance tests. It allows operating securely and reliable and to provide two years warranty for trailer flooring.

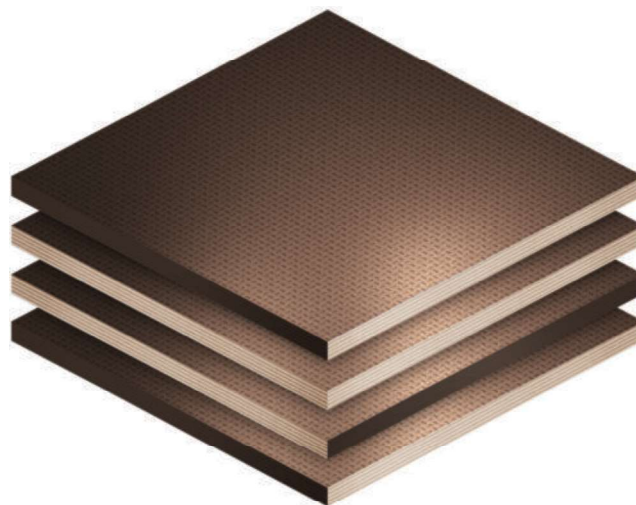

Key benefits

- 01 **Load resistance**
- 02 **Resistance to loading of roller wheels (according to SFS 3939)**
- 03 **Resistance to surface wear (according to EN 438-2:2016)**
- 04 **Slip resistance (according DIN 51130 and EN 12195)**

Technical specifications

Standard sizes, length x width, mm (ft)	2440x1220x2440/2500x1250x2500 (8x4x8) 1500x2500 (5x8) 1500x3000/1525x3050 (5x10)
Thickness, mm	21-32
Surface type	Wiremesh/smooth (W/F)
Resistance to surface wear (taber-test), rotations, EN 438-2:2016	350 - 2600
Resistance to loading of roller wheels (rolling-test), cycles	10000
Slip resistance (ramp-test)	R13
Slip resistance (coefficient of friction)	Up to 0,55 (for wooden pallet)
Surface color	Black, dark brown
Film density	120-220 g/m ²
Formaldehyde emission class	E1
Water resistance	High
Density, kg/m ³	640-700
Moisture content, %	≤14
Produced under STO.*	

Strength specifications

DIMENSION		THICKNESS, MM	VALUE
Ultimate static bending strength, min MPa	along the outer layer grain	21-32	60
	across the outer layer grain		30
Static bending elasticity modulus, min MPa	along the grain		6000
	across the grain		3000

* For STO visit "Certificates" section of website.