


SVEZA PAINT

100% birch plywood, specially designed for painting. Can be used for both interior and exterior work, including the decoration of walls and facades, doors and furniture, vehicle bodies, and sports equipment. Has a surface which is suitable for use as a base for any variety of colors.

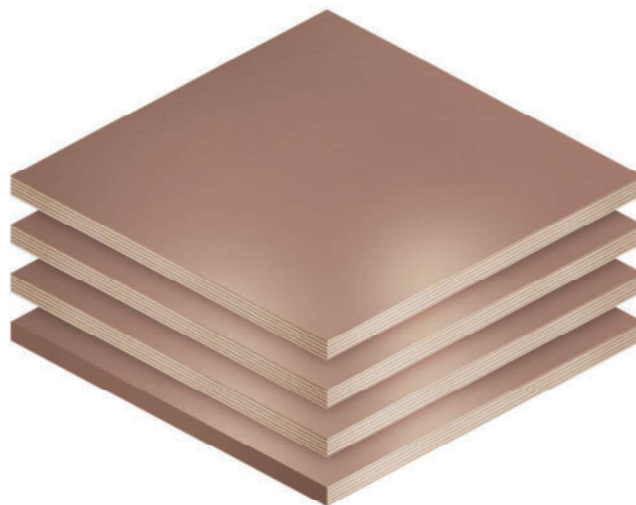

Key benefits

- 01 **100% birch plywood**
- 02 **Work time cut by 70%***
- 03 **Min consumption of priming material**
- 04 **Smooth finish**
- 05 **Durable result with no cracking**
- 06 **Weather resistant****

Technical specifications

Standard sizes, length x width, mm [ft]	1220x2440/1250x2500 [4x8] 1500x3000/1525x3050 [5x10]
Thickness, mm	6-21 (thicknesses up to 40 mm available upon customer's request)
Surface type	Smooth/smooth [F/F]
Surface color (film density)	Kraft [214 g/m ²]
Formaldehyde emission class	E1
Glue type	Exterior [WBP]
Density, kg/m ³	640-700
Moisture content, %	5-14
Edge sealing	Painted on request
Produced under STO,***	

Strength specifications

DIMENSION		THICKNESS, MM	VALUE
Ultimate static bending strength, min MPa	along the grain of face veneers	9-21	60
	against the grain of face veneers		30
Ultimate tensile strength along the grain, min MPa		6-8	30
Static bending elasticity modulus, min MPa	along the grain	9-21	6000
	against grain		3000

* Due to no need for pre-work, which amounts to 70% of painting time. Confirmed during an experiment with a playground manufacturer, Moscow, 2017.

** UV resistance.

*** For STO visit "Certificates" section of website.