


SVEZA DECK 2.0

SVEZA Deck 2.0 is 100% birch plywood for slab formwork used in applications with stringent requirements for off-form concrete surface finishes.

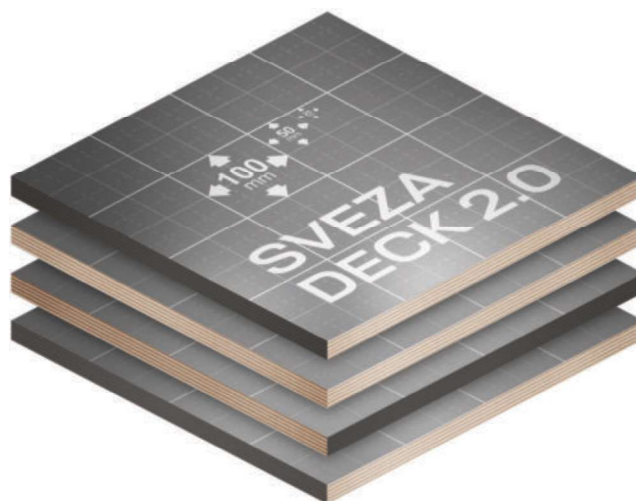

Key benefits

- 01 **Improved water-resistant coating**
- 02 **Improved water-resistant edge**
- 03 **Protected from the effects of concrete mixtures**
- 04 **Absorbs less heat in sunlight**
- 05 **Doesn't discolor concrete**
- 06 **Easy to mark**
- 07 **Features a layout grid**
- 08 **Packed on lumber**

Technical specifications

Standard sizes, length x width, mm (ft)	1220 x2440x1220 (4x8x4) 1250x2500x1250 (4x8 x4)
Thickness, mm	18, 21
Surface type	Smooth /special smooth film (F/F)
Wear resistance of the film, cycles in Taber abrasion test	350
Formaldehyde emission class	E1
Water resistance	High
Density, kg/m ³	640-700
Moisture content, %	≤ 12
Edge sealing	Waterborne acrylic paint
Produced under STO.*	

Strength specifications

DIMENSION		VALUE
Ultimate static bending strength, min MPa	along the outer layer grain	60
	across the outer layer grain	30
Static bending elasticity modulus, min MPa	along the grain	6000
	across the grain	3000

* For STO visit "Certificates" section of website.